



**VBS 669** EVO 300 DELTA




### VBS 669 EVO 300 DELTA

Macchina a braccio di ultimissima progettazione, idonea per la cucitura di piccola pelletteria quali borse, valigette, portafogli e calzature in genere. Grazie alle dimensioni della placca a punta che sono state ridotte al minimo, al crochet CO.ME.TA. con salva ago e al triplice trasporto, si presta a cuciture particolarmente difficili dove una normale macchina a braccio non riesce ad arrivare, garantendo ottimi risultati di cucitura. Sistema di cucitura standard a destra dell'ago con possibilità di montare il kit di cucitura a sinistra dell'ago e di inserire la guida elettronica a sinistra.

### VBS 669 EVO 300 DELTA

*Newly designed cylinder-arm machine, suitable for stitching items of small leather goods such as bags, cases, wallets and footwear in general. Thanks to the dimensions of the pointy needle plate that have been reduced to the minimum, to the CO.ME.TA. hook with needle guard and to the triple feeding, it is particularly suitable for difficult sewing operations which cannot be carried out through ordinary cylinder-arm machines, ensuring excellent stitching results. Standard sewing system to the right of the needle with the possibility of mounting the sewing kit to the left of the needle and to insert the electronic guide on the left.*

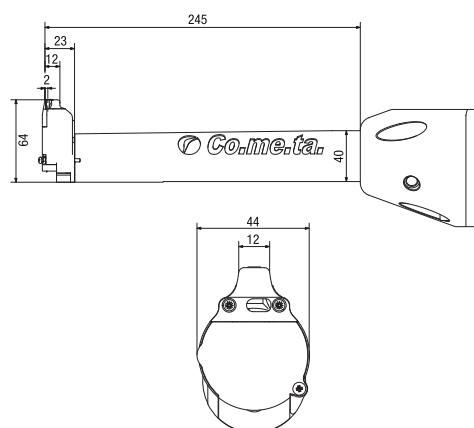

max 4 mm



1 ago (134x35)  
1 needle (134x35)



triplice trasporto  
bottom feed, needle feed and  
alternating feet



NOVITÀ CROCHET CO.ME.TA. • CON SALVA AGO  
crochet rotativo piccolo ad asse orizzontale  
small rotative hook with horizontal axis



punto annodato  
lockstitch



60/3 – 20/3



Tensione filo programmabile  
Programmable thread tension



Regolazione Lunghezza punto  
Stitch lenght adjustment



Corsa del piedino programmabile  
Programmable sewing foot stroke



Pressione del piedino programmabile  
Programmable sewing foot pressure



Luce LED Integrata  
Integrated LED light.



rilevamento automatico spessore materiale  
automatic material thickness detection



avvolgibobina a motore  
motor driven bobbin winder



pannello operativo di controllo touch  
program control, operating panel

Massima velocità di cucitura 1000 rpm  
Sewing maximum speed 1000 rpm



KIT CUCITURA SINISTRO

KIT CUCITURA DESTRO