




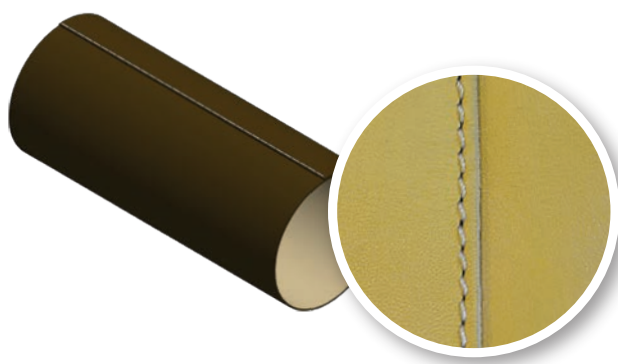

VBS 669 FRONTALE
TRIPLICE TRASPORTO

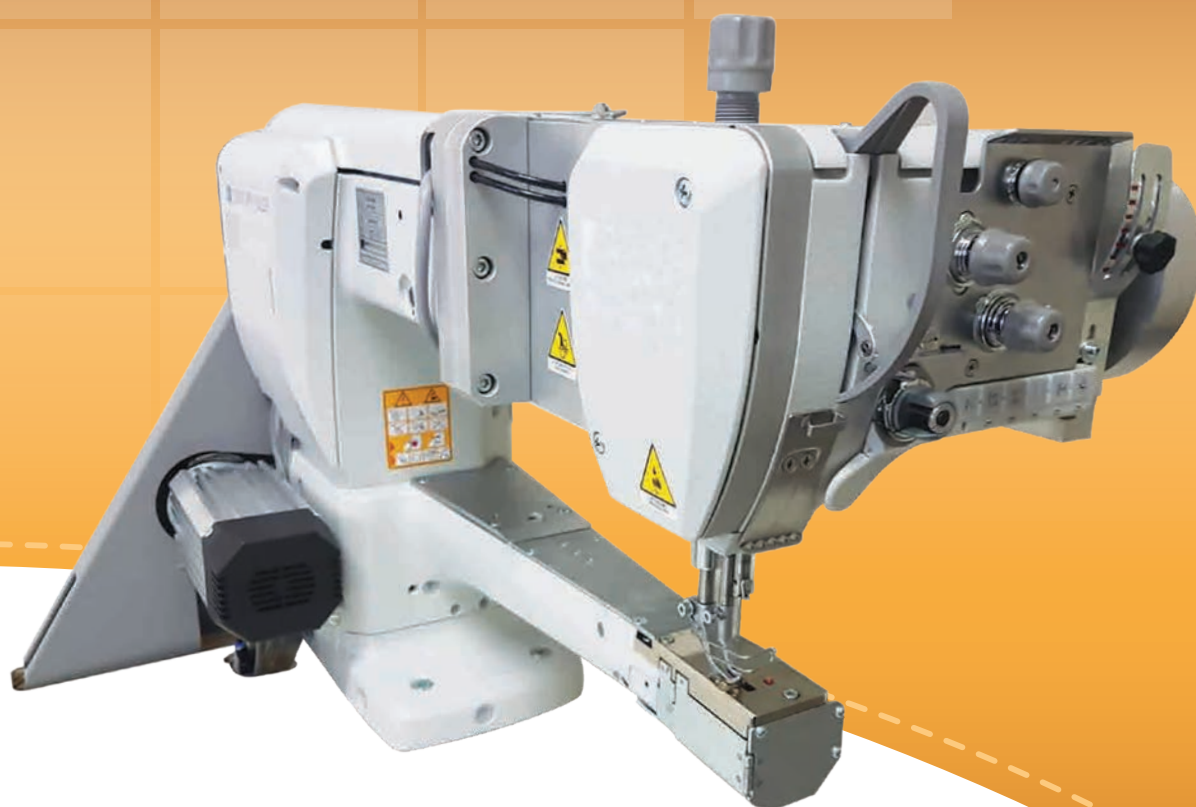

max 5 mm

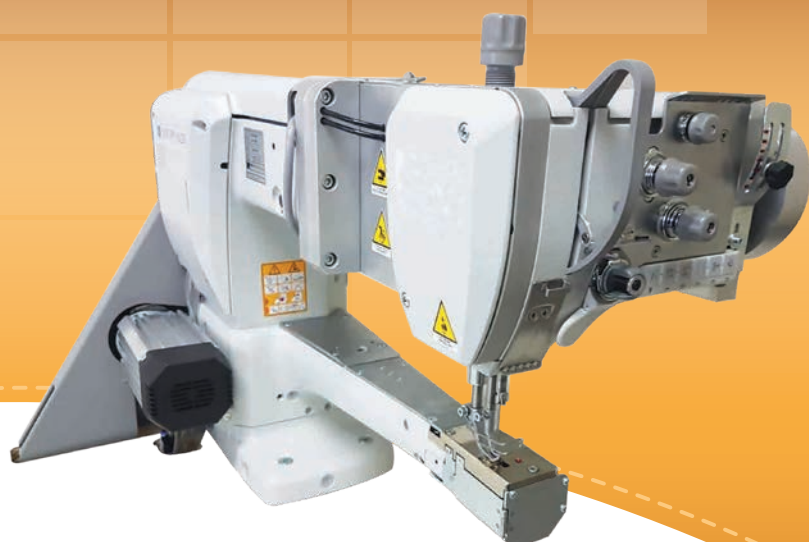

1 ago (134x35)
1 needlo (134x35)



triplice trasporto
bottom feed, needle feed and
alternating feet



crochet rotativo grande ad asse orizzontale
large rotative hook with horizontal axis



punto annodato
lockstitch



60/3 – 10/3

VBS 669 FRONTALE TRIPLICE TRASPORTO

Macchina a braccio di ultimissima progettazione, idonea per i processi delle cuciture su pezzi tubolari. Ideale per il settore della pelletteria per quelle cuciture difficili come le operazioni di assemblaggio. La particolarità della trasformazione consiste nella modalità di trasporto del materiale che permette di cucire in orizzontale, cioè da sinistra verso destra anziché dall'alto verso il basso.

VBS 669 FEED-ON TRIPLE FEEDING

Newly designed cylinder-arm machine, suitable for tubular seam. It's the ideal machine for the leather industry, for difficult seams like assembly works. Its peculiarity of transformation is the transportation of the material allowing horizontal seam from left to right instead of up and down.

Massima velocità di cucitura 1000 rpm
Sewing maximum speed 1000 rpm

Lunghezza braccio: 365 mm o 503 mm
Arm lenght: 365 mm or 503 mm

